

12kW

Powered By Kubota
Kubota




EPS Tier 4 Mobile Enclosed Diesel Power Generator

- *Designed from the ground up to meet EPA Tier 4 Final emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Options available for customized installation*
- *Enclosed and open configurations available*

Kubota


AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

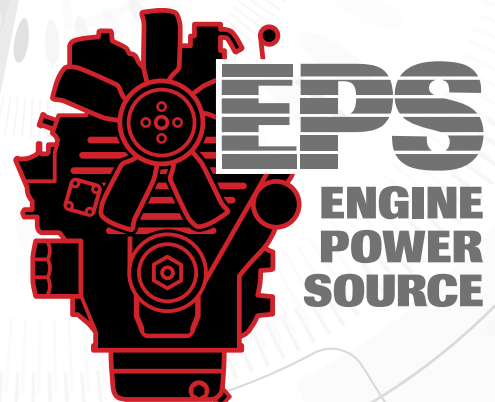

EPS 12kW Mobile Generator Standard Features (Enclosed Models)

- Designed from the ground up to meet Tier 4 Final emissions regulations.
 - Rugged construction top-to-bottom for dependable service and a long life.
 - Compact modular designs have been optimized for high performance in minimal space.
 - Numerous noise and vibration-reducing technologies are employed for in an exceptionally quiet and smooth running unit.
 - Easy installation hook-ups for exhaust, battery and fuel.
- Two-step powder coat painting process helps reduce corrosion.
 - Fully load bank tested to verify that performance meets specifications.
 - Water-cooled, Kubota Tier 4 Final diesel engine helps ensure reliability, long life and low cost operation.
 - Convenient single-side service with full access to engine maintenance parts.
 - Unit can be base mounted or hung (ideal for trucks or trailers).


Various options available. Please call 704-944-1895 for details.

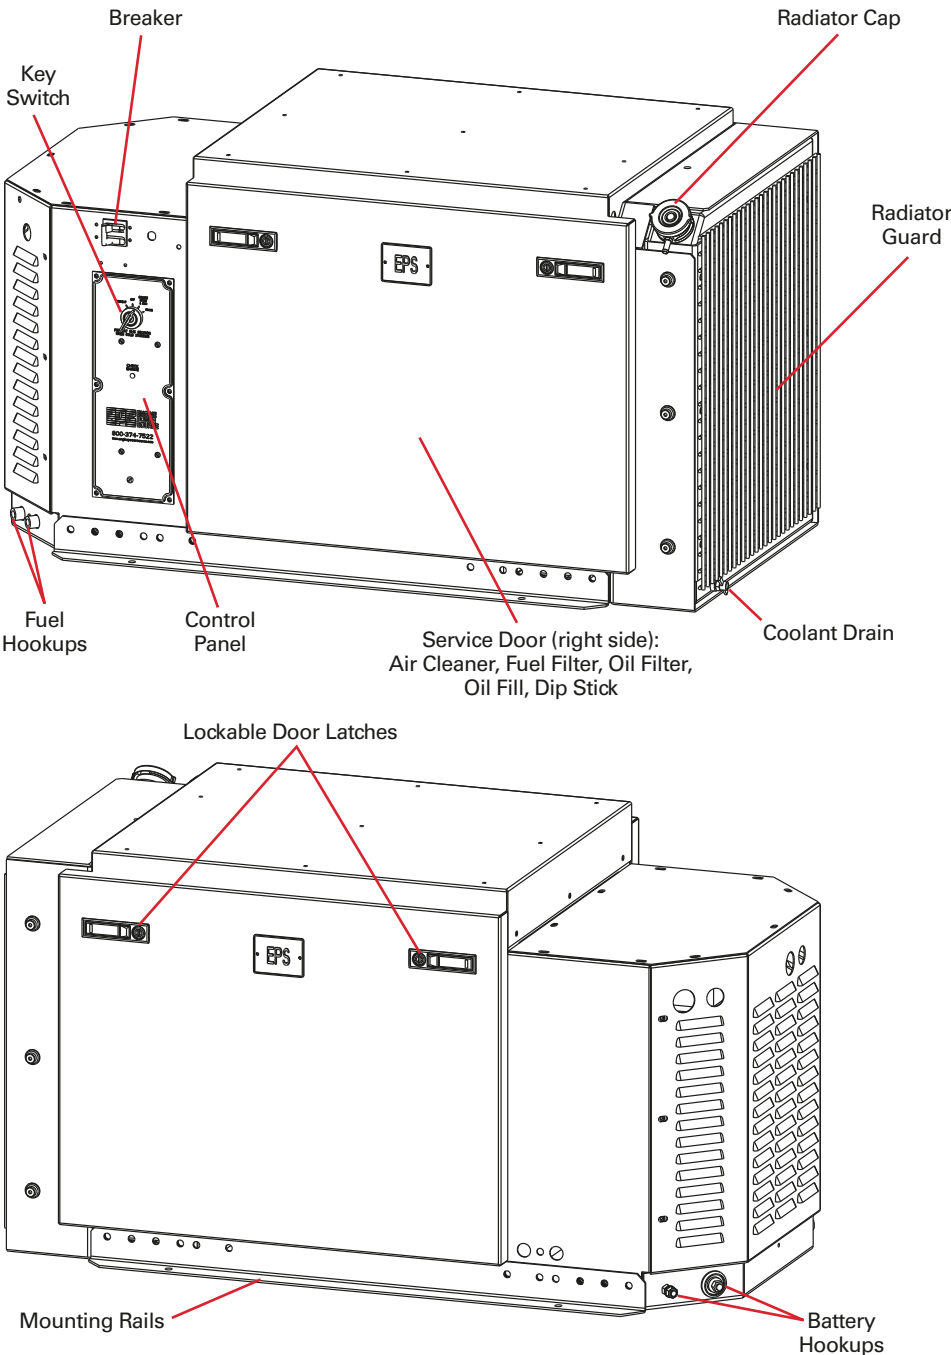

Specifications

Kubota Engine Model	V1505 BG
kW (Stand-by)	12
kW (Continuous)	11
Frequency	60hz
Single Phase Config. (S12KM11EDE2S9)	
Voltage	120 / 240
Standby Amps	50 @ 1.0 PF
Continuous Amps	45.8 @ 1.0 PF
Three Phase Config. 1 (S12KM83EDE2S9)	
Voltage	120 / 208-Wye
Standby Amps	40 @ 0.83 PF
Continuous Amps	38.2 @ 0.80 PF
Three Phase Config. 2 (S12KM13EDE2S9)	
Voltage	120 / 240-Delta
Standby Amps	35 @ 0.83 PF
Continuous Amps	33.1 @ 0.80 PF
Three Phase Config. 3 (S12KM43EDE2S9)	
Voltage	277 / 480-Wye
Standby Amps	20 @ 0.72 PF
Continuous Amps	16.5 @ 0.80 PF
All Configurations	
Fuel Cons. 25% Load	.46 US Gal/hr.
Fuel Cons. 50% Load	.73 US Gal/hr.
Fuel Cons. Full Load	1.19 US Gal/hr.
Weight*	728 lbs.
Length (Single / 3-Phase)	45.12 in. / 49.57 in.
Width (Single / 3-Phase)	24.00 in. / 24.00 in.
Height (Single / 3-Phase)	24.53 in. / 24.53 in.

* weight includes oil & antifreeze



348 Bryant Blvd. | Rock Hill, SC 29732
704-944-1895 | Toll-Free: 800-374-7522

enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reserved.