25kW

Powered By Kubota

EPS Tier 4 Mobile Open Diesel Power Generator

- *Designed from the ground up to meet EPA Tier 4 Final emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Options available for customized applications*
- *Open and enclosed configurations available*

EPS
ENGINE POWER SOURCE

Kubota
AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

EPS 25kW Mobile Generator Standard Features (Open Models)

- Designed from the ground up to meet Tier 4 Final emissions regulations.
- Rugged construction top-to-bottom for dependable service and a long life.
- Compact modular designs have been optimized for high performance in minimal space.
- Numerous noise and vibration-reducing technologies are employed for in an exceptionally quiet and smooth running unit.
- Easy installation hook-ups for exhaust, battery and fuel.
- Two-step powder coat painting process helps reduce corrosion.
- Fully load bank tested to verify that performance meets specifications.
- Water-cooled, Kubota Tier 4 Final diesel engine helps ensure reliability, long life and low cost operation.
- Convenient single-side service with full access to engine maintenance parts.

Various options available. Please call 704-944-1895 for details.

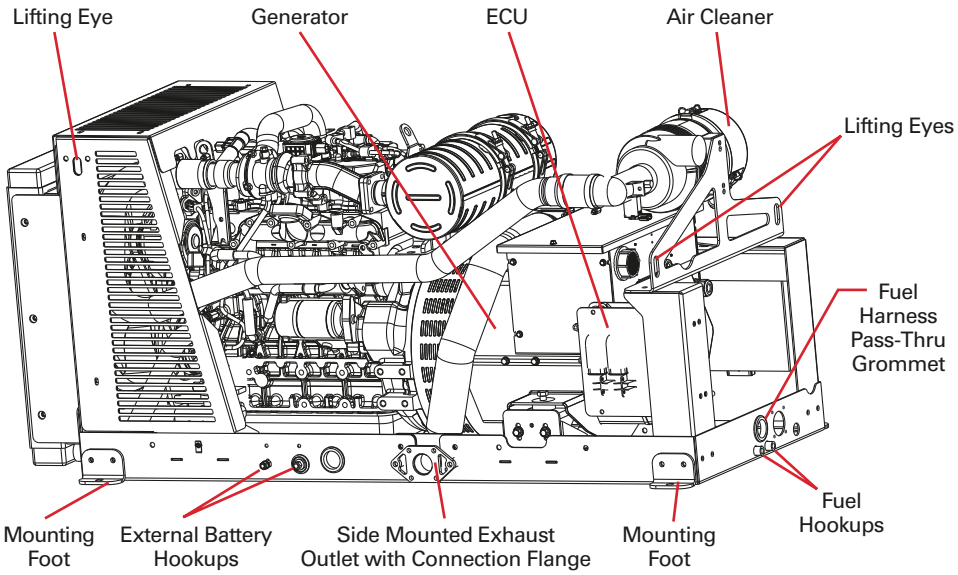

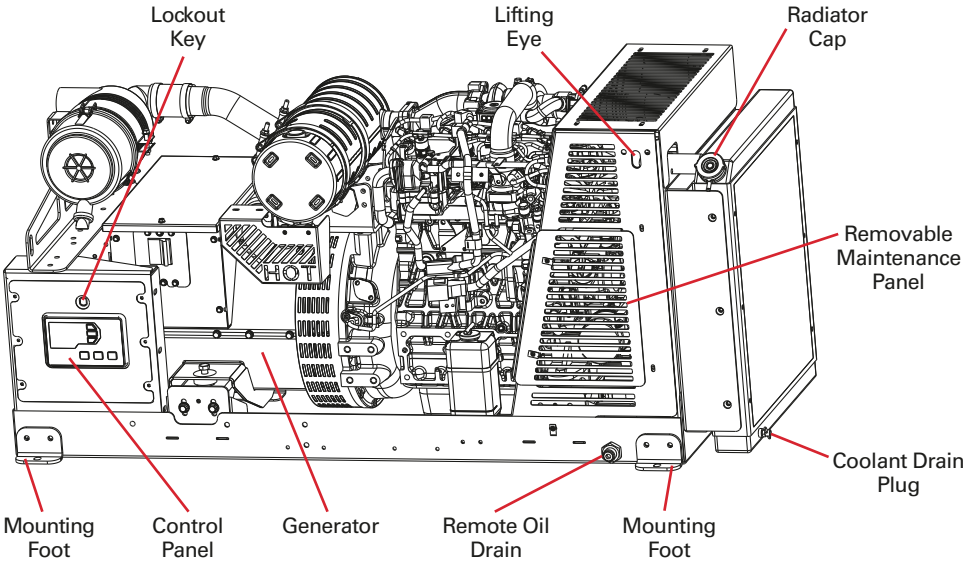

Specifications

Kubota Engine Model	V2403TE4BG-EPS1
kW (Stand-by)	25
kW (Continuous)	24
Frequency	60Hz
Single Phase Config. (J25KA11OSE3UU)	
Voltage	120/240
Standby Amps	208/104 @ 1.0 PF
Continuous Amps	200/100 @ 1.0 PF
Three Phase Config. 1 (J25KA83OSE4UU)	
Voltage	120/208
Standby Amps	80 @ 0.87 PF
Continuous Amps	83.3 @ 0.83 PF
Three Phase Config. 2 (J25KA13OSE4UU)	
Voltage	120/240
Standby Amps	63 @ 0.95 PF
Continuous Amps	63 @ 0.92 PF
Three Phase Config. 3 (J25KA43OSE4UU)	
Voltage	277/480
Standby Amps	40 @ 0.75 PF
Continuous Amps	36 @ 0.80 PF
All Configurations	
Fuel Cons. 25% Load	0.44 US Gal/hr
Fuel Cons. 50% Load	0.88US Gal/hr
Fuel Cons. Full Load	1.93 US Gal/hr
Weight w/oil & antifreeze	1,190 lbs.
Length	63.62 in.
Width	25.76 in.
Height	28.64 in

348 Bryant Blvd. | Rock Hill, SC 29732
704-944-1895 | Toll-Free: 800-374-7522
enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reseved.