

30kW

Powered By Kubota
Kubota




EPS Tier 4 Mobile Enclosed Diesel Power Generator

- *Designed from the ground up to meet EPA Tier 4 Final emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Options available for customized installation*
- *Enclosed and open configurations available*

Kubota


AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

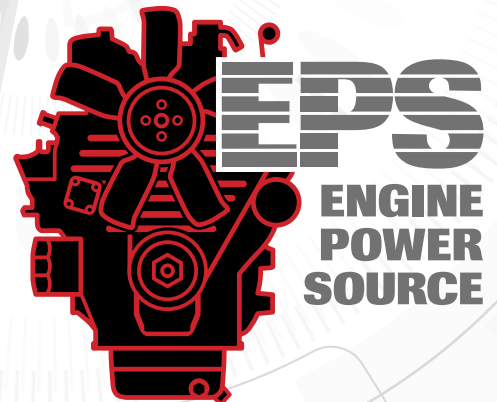

EPS 30kW Mobile Generator Standard Features (Enclosed Models)

- Designed from the ground up to meet Tier 4 Final emissions regulations.
 - Rugged construction top-to-bottom for dependable service and a long life.
 - Compact modular designs have been optimized for high performance in minimal space.
 - Numerous noise and vibration-reducing technologies are employed for in an exceptionally quiet and smooth running unit.
 - Easy installation hook-ups for exhaust, battery and fuel.
- Two-step powder coat painting process helps reduce corrosion.
 - Fully load bank tested to verify that performance meets specifications.
 - Water-cooled, Kubota Tier 4 Final diesel engine helps ensure reliability, long life and low cost operation.
 - Convenient single-side service with full access to engine maintenance parts.
 - Unit can be base mounted or hung (ideal for trucks or trailers).


Various options available. Please call 704-944-1895 for details.

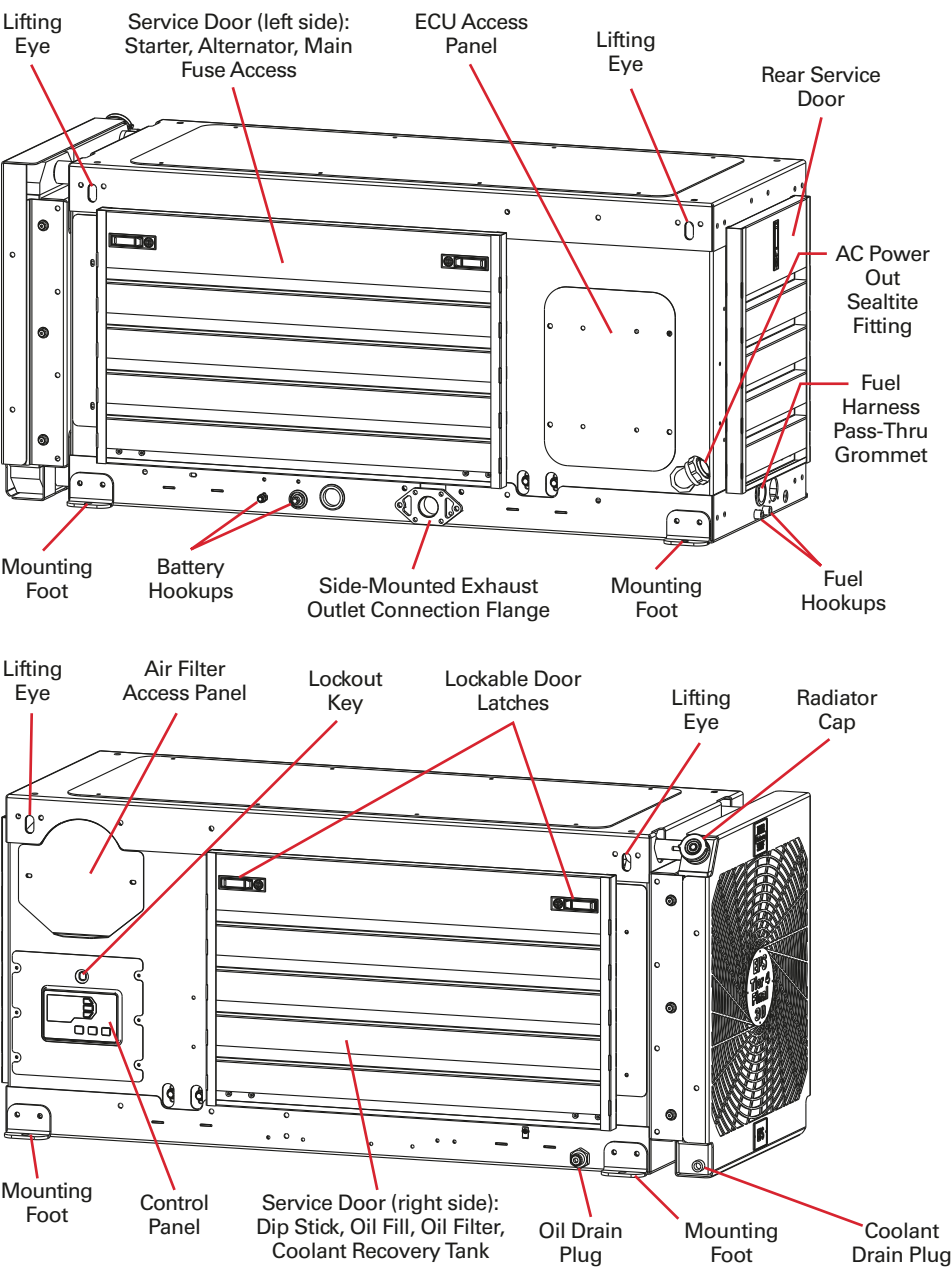

NOTE: "Mounting Feet" can be removed and relocated to "Lifting Eye" position to hang generator from chassis rather than install to floor of vehicle.

Specifications

Kubota Engine Model	V2403TIE4GEPS
kW (Stand-by)	30.1
kW (Continuous)	27.9
Frequency	60hz
Single Phase Config. (J30KA11ESE)	
Voltage	120 / 240
Standby Amps	250/125 @ 1.0 PF
Continuous Amps	232/116 @ 1.0 PF
Three Phase Config. 1 (J30KA83ESE4UU)	
Voltage	120 / 208
Standby Amps	100 @ 0.83 PF
Continuous Amps	97 @ 0.80 PF
Three Phase Config. 2 (J30KA13ESE4UU)	
Voltage	120 / 240
Standby Amps	80 @ 0.90 PF
Continuous Amps	80 @ 0.84 PF
Three Phase Config. 3 (J30KA43ESE4UU)	
Voltage	277/480
Standby Amps	40 @ 0.90 PF
Continuous Amps	40 @0.84 PF
All Configurations	
Fuel Cons. 25% Load	0.49 US Gal/hr
Fuel Cons. 50% Load	0.97 US Gal/hr
Fuel Cons. Full Load	2.14 US Gal/hr
Weight w/oil & antifreeze	1322 lbs.
Length	63.93 in.
Width	26.93 in.
Height	28.6 in.



348 Bryant Blvd. | Rock Hill, SC 29732
 704-944-1895 | Toll-Free: 800-374-7522

enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reserved.