40kW

Powered By Kubota

EPS Tier 4 Mobile Enclosed Diesel Power Generator

- *Designed from the ground up to meet EPA Tier 4 Final emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Options available for customized installation*
- *Enclosed and open configurations available*

Kubota

AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

EPS
ENGINE
POWER
SOURCE

EPS 40kW Mobile Generator Standard Features (Enclosed Models)

- Designed from the ground up to meet Tier 4 Final emissions regulations.
- Rugged construction top-to-bottom for dependable service and a long life.
- Compact modular designs have been optimized for high performance in minimal space.
- Numerous noise and vibration-reducing technologies are employed for in an exceptionally quiet and smooth running unit.
- Easy installation hook-ups for exhaust, battery and fuel.
- Two-step powder coat painting process helps reduce corrosion.
- Fully load bank tested to verify that performance meets specifications.
- Water-cooled, Kubota Tier 4 Final diesel engine helps ensure reliability, long life and low cost operation.
- Convenient single-side service with full access to engine maintenance parts.
- Unit can be base mounted or hung (ideal for trucks or trailers).

Various options available. Please call 704-944-1895 for details.

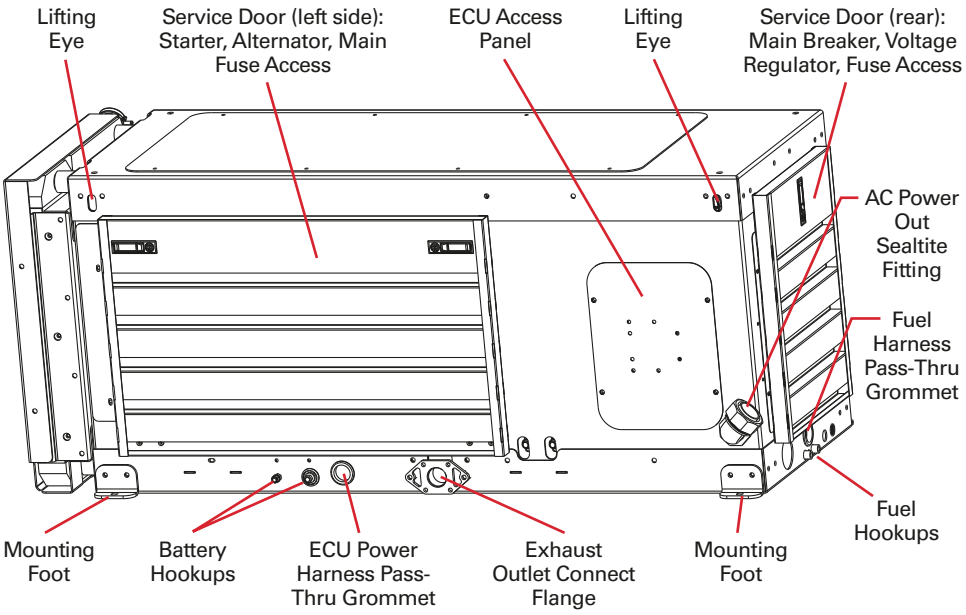

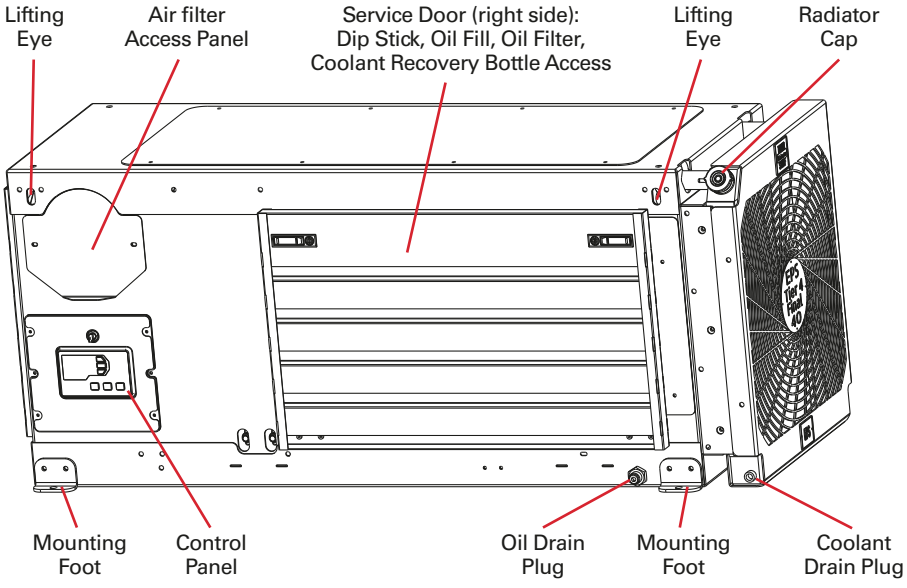

NOTE: "Mounting Feet" can be removed and relocated to "Lifting Eye" position to hang generator from chassis rather than install to floor of vehicle.

Specifications

Kubota Engine Model	V2403TIE4BG
kW (Stand-by)	40
kW (Continuous)	36
Frequency	60hz
Single Phase Config. (J40KM11ESE3UU)	
Voltage	120 / 240
Standby Amps	334/167 @ 1.0PF
Continuous Amps	300/150 @ 1.0PF
Three Phase Config. 1 (J40KM83ESE4UU)	
Voltage	120 / 208
Standby Amps	125 @ 0.89PF
Continuous Amps	125 @ 0.8PF
Three Phase Config. 2 (J40KM13ESE4UU)	
Voltage	120 / 240
Standby Amps	120 @ 0.8PF
Continuous Amps	108 @ 0.8PF
Three Phase Config. 3 (J40KM43ESE4UU)	
Voltage	277 / 480
Standby Amps	60 @ 0.8PF
Continuous Amps	54 @ 0.8PF
All Configurations	
Fuel Cons. 25% Load	0.68 US Gal/hr.
Fuel Cons. 50% Load	1.37 US Gal/hr.
Fuel Cons. Full Load	3.0 US Gal/hr.
Weight w/oil & antifreeze	1,408 lbs.
Length	68.98 in.
Width	25.76 in.
Height	28.77 in.

348 Bryant Blvd. | Rock Hill, SC 29732
704-944-1895 | Toll-Free: 800-374-7522
enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reseved.