

40kW

Powered By Kubota
Kubota




EPS Emergency Stationary Enclosed Diesel Power Generator

- *Compliant with EPA Emergency Stationary RICE (Reciprocating Internal Combustion Engine) Standards*
- *Rugged, heavy duty design and construction for dependable performance and long product life*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Enclosed and open configurations available*
- *Also available in 20kW size*

Kubota

AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

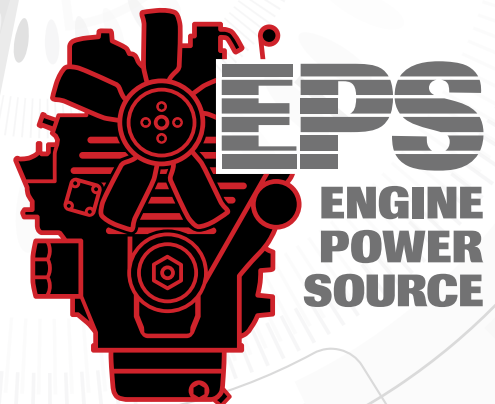

40kW Emergency Stationary Enclosed Generator (20kW Models Also Available)

This genset is powered by an Emergency Stationary Reciprocating Internal Combustion Engine (RICE) as defined in 40 CFR § 63.6675 “to provide electrical power...during an emergency situation.” Therefore this generator may not be operated for maintenance and non-emergency situations in excess of the limits outlined in 40 CFR § 63.6640.


These EPA regulations require the unit be installed permanently in a stationary location and, therefore, this unit may not be used in mobile applications under penalty of law as outlined in 40 CFR § 1068.101 (b)(3). When installing this unit, the user should also ensure compliance with all state and local ordinances pertaining to this type of equipment.

Please refer to the Installation & Maintenance Manual for additional information.

Standard features include:


- 2-wire start
- On-board battery and cables
- Battery charger
- 11-gauge steel construction
- 2-step powder-coated paint
- Non-corrosive aluminum doors
- Coolant heater
- Standard muffler

Various options available. Please call 704-944-1895 for details.

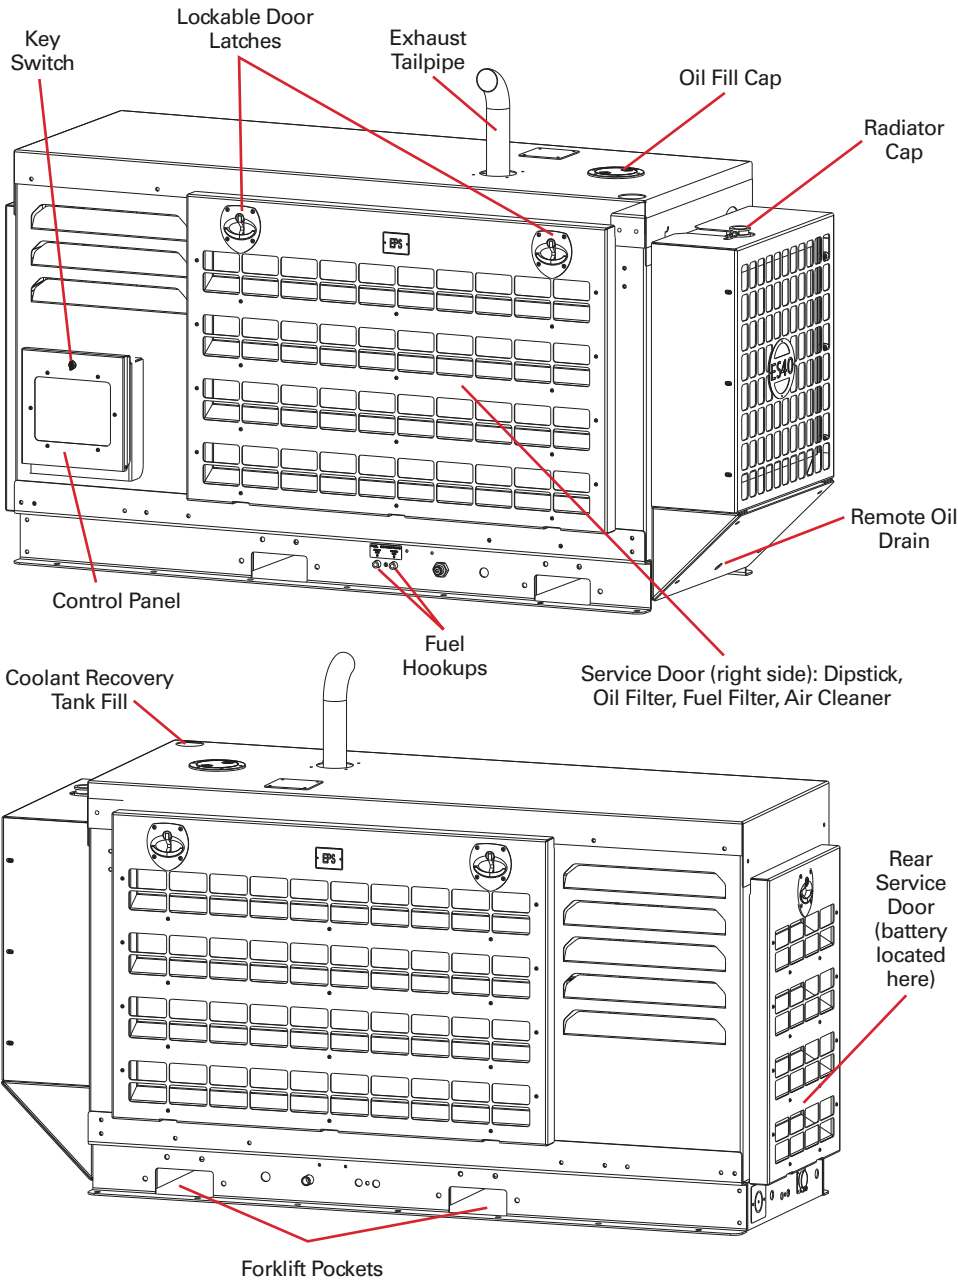

Specifications

Kubota Engine Model	V3600-TE3BG
kW (Stand-by)	40
kW (Continuous)	36.3
Frequency	60hz
Single Phase Config. (ES10040ENC)	
Voltage	120/240
Standby Amps	350/175 @ 0.95 PF
Continuous Amps	302/151 @ 1.0 PF
Three Phase Config. 1 (E40KN83EUEXUZZ)	
Voltage	120 / 208-Wye
Standby Amps	125 @ 0.89 PF
Continuous Amps	125 @ 0.81 PF
Three Phase Config. 2 (E40KN13EUEXUZZ)	
Voltage	120 / 240-Delta
Standby Amps	125 @ 0.77 PF
Continuous Amps	109 @ 0.80 PF
Three Phase Config. 3 (E40KN43EUEXUZZ)	
Voltage	277 / 480-Wye
Standby Amps	60 @ XX0.80 PF
Continuous Amps	54.6 @ 0.80 PF
All Configurations	
Fuel Cons. 25% Load	0.75 US Gal/hr.
Fuel Cons. 50% Load	1.506 US Gal/hr.
Fuel Cons. Full Load	3.00 US Gal/hr.
Weight w/oil & antifreeze	1639.00 lbs.
Length	85.61 in.
Width	29.00 in.
Height	57.00 in.



348 Bryant Blvd. | Rock Hill, SC 29732
704-944-1895 | Toll-Free: 800-374-7522
enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reserved.