9kW

Powered By Kubota

EPS Tier 4 Mobile Enclosed Diesel Power Generator

- *Designed from the ground up to meet EPA Tier 4 Final emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Quiet and smooth running*
- *Easy installation hook-ups*
- *Options available for customized installation*
- *Enclosed and open configurations available*

Kubota
AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

EPS
ENGINE
POWER
SOURCE

EPS 9kW Mobile Generator Standard Features (Enclosed Models)

- Designed from the ground up to meet Tier 4 Final emissions regulations.
- Rugged construction top-to-bottom for dependable service and a long life.
- Compact modular designs have been optimized for high performance in minimal space.
- Numerous noise and vibration-reducing technologies are employed for in an exceptionally quiet and smooth running unit.
- Easy installation hook-ups for exhaust, battery and fuel.
- Two-step powder coat painting process helps reduce corrosion.
- Fully load bank tested to verify that performance meets specifications.
- Water-cooled, Kubota Tier 4 Final diesel engine helps ensure reliability, long life and low cost operation.
- Convenient single-side service with full access to engine maintenance parts.
- Unit can be base mounted or hung (ideal for trucks or trailers).

Various options available. Please call 704-944-1895 for details.

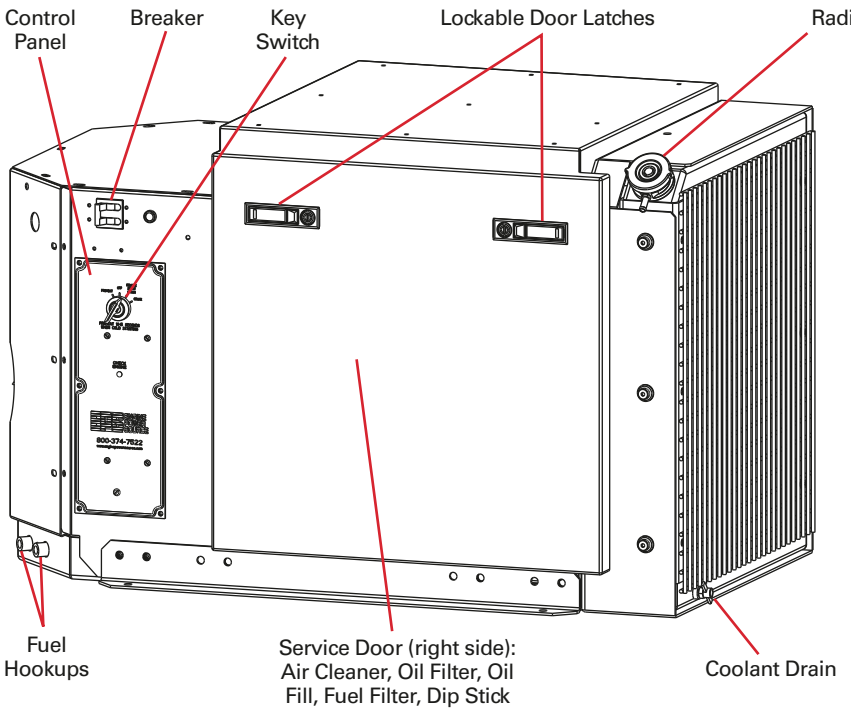

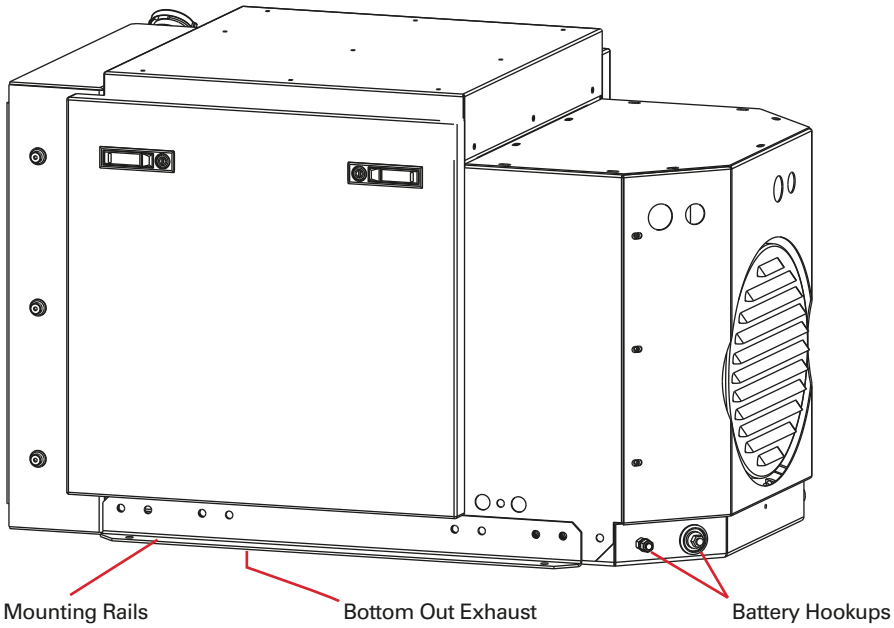

Specifications

Kubota Engine Model	D1105 BG
kW (Stand-by)	9
kW (Continuous)	8
Frequency	60Hz
Single Phase Config. (S09KM11EDE2S9)	
Voltage	120/240
Standby Amps	40 @ 0.94 PF
Continuous Amps	33.3 @ 1.0 PF
Three Phase Config. 1 (S09KM83EDE2S9)	
Voltage	120/208-Wye
Standby Amps	30 @ 0.83 PF
Continuous Amps	27.8 @ 0.80 PF
Three Phase Config. 2 (S09KM13EDE2S9)	
Voltage	120/240-Delta
Standby Amps	25 @ .87 PF
Continuous Amps	24 @ 0.80 PF
Three Phase Config. 3 (S09KM43EDE2S9)	
Voltage	277/480-Wye
Standby Amps	15 @ 0.72 PF
Continuous Amps	12 @ 0.80 PF
All Configurations	
Fuel Cons. 25% Load	.31 US Gal/hr.
Fuel Cons. 50% Load	.49 US Gal/hr.
Fuel Cons. Full Load	.8 US Gal/hr.
Weight (Single / 3-Phase)*	635 lbs./642 lbs.
Length (Single / 3-Phase)	39.42 in./49.62 in.
Width (Single / 3-Phase)	24.00 in./24.00 in.
Height (Single / 3-Phase)	24.53 in./24.50 in.

* weight includes oil & antifreeze

EPS ENGINE POWER SOURCE

348 Bryant Blvd. | Rock Hill, SC 29732
704-944-1895 | Toll-Free: 800-374-7522
enginepowersource.com/generators

All unit ratings are established at 1.0 power factor, 68° F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10° F above 68° F. Specifications subject to change without notice. Copyright © 2025, Engine Power Source. All rights reseved.