


49-74 HP TIER 4 FINAL DIESEL POWER UNITS

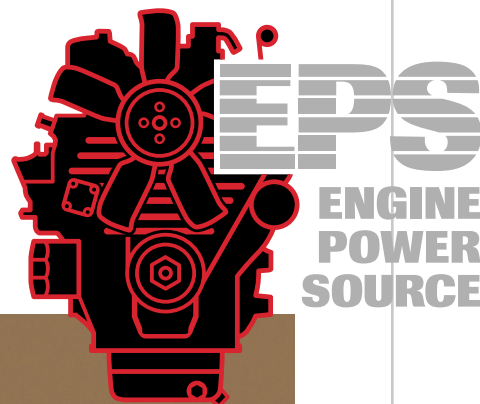

65 HP Open Unit


- *Designed from the ground up to meet EPA Tier 4 emissions regulations*
- *Rugged, heavy duty design and performance*
- *Compact modular designs have been optimized for high performance in minimal space*
- *Flexible options*

Kubota


AUTHORIZED DISTRIBUTOR
ENGINES | GENERATORS | PARTS

EPS 49.6 HP Tier 4 Final Diesel Power Unit Details


49.6 HP ENCLOSED UNIT

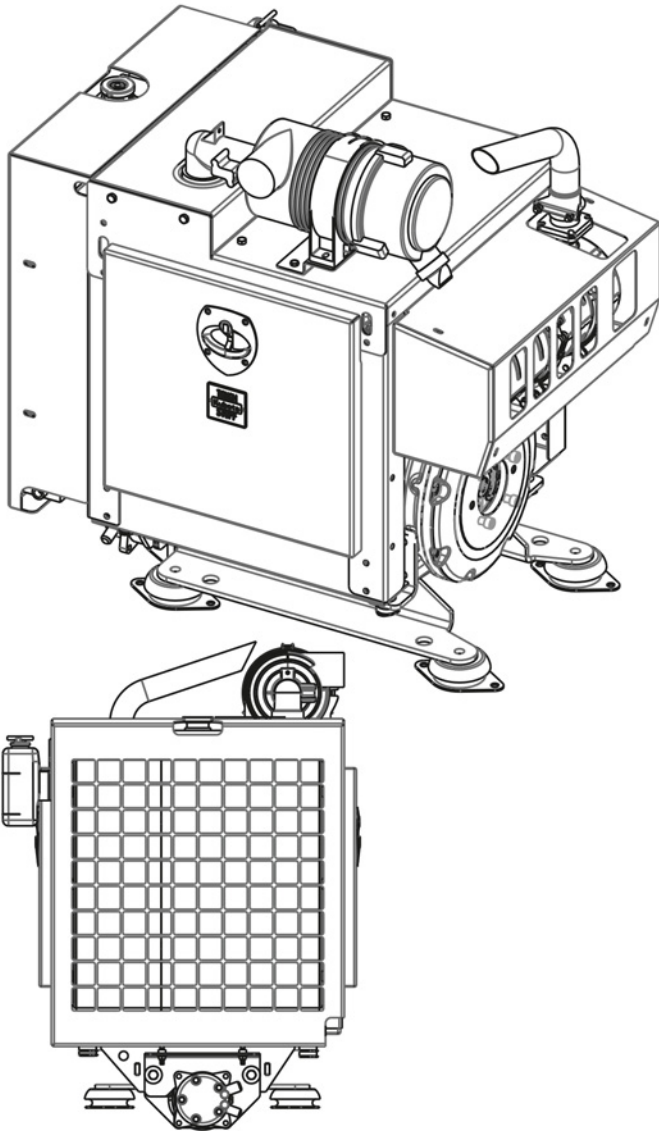

49.6 HP OPEN UNIT

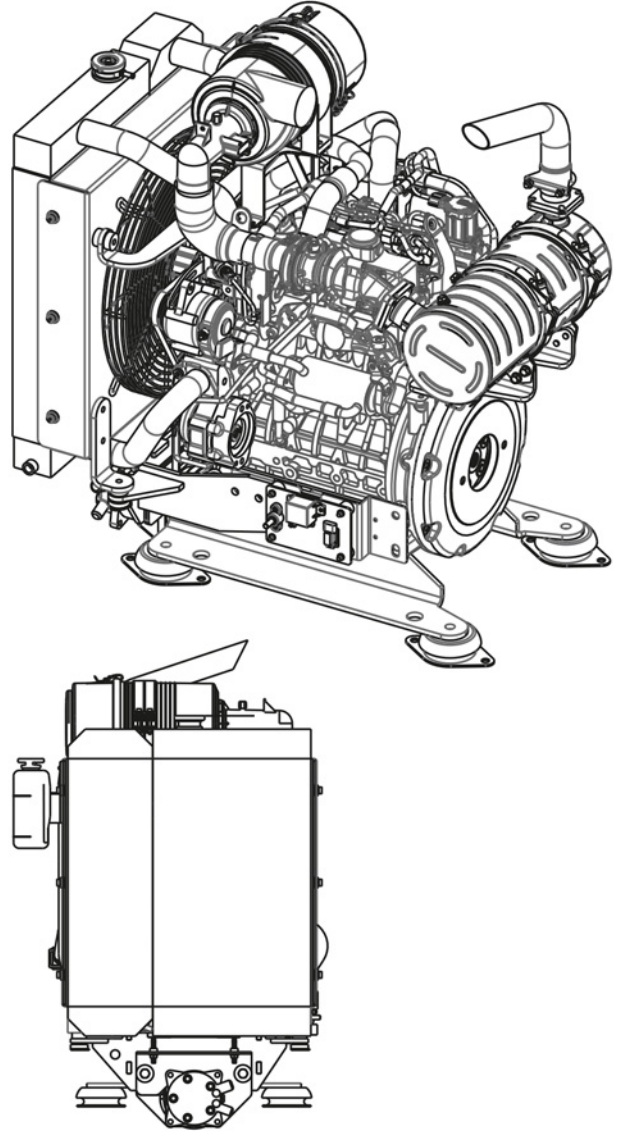

CONFIGURATION	ENCLOSED	OPEN
EPS Model Number	D1803TIE	D1803TIO
Power (HP)	49.6 @ 2,700 RPM	49.6 @ 2,700 RPM
Engine	Kubota D1803-CR-TIE4B	Kubota D1803-CR-TIE4B
Emission Tier	Tier 4 Final	Tier 4 Final
Torque	111 FT-LBF @ 1,500 RPM	111 FT-LBF @ 1,500 RPM
Fuel Consumption (US Gallons)	0.403 LB/HP-HR	0.403 LB/HP-HR
Length (inches)	38.66	37.72
Width (inches)	31.00	27.26
Height including eng. isolation (in.)	40.46	40.46
Weight (including oil & antifreeze)	N/A	N/A




All unit ratings are established at 68 degrees F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10 degrees F above 68 degrees F.

Illustrations shown may include optional equipment. Specifications subject to change without notice.

See back page for features and options.


EPS 49.6 HP Tier 4 Final Diesel Power Unit Details (cont'd)

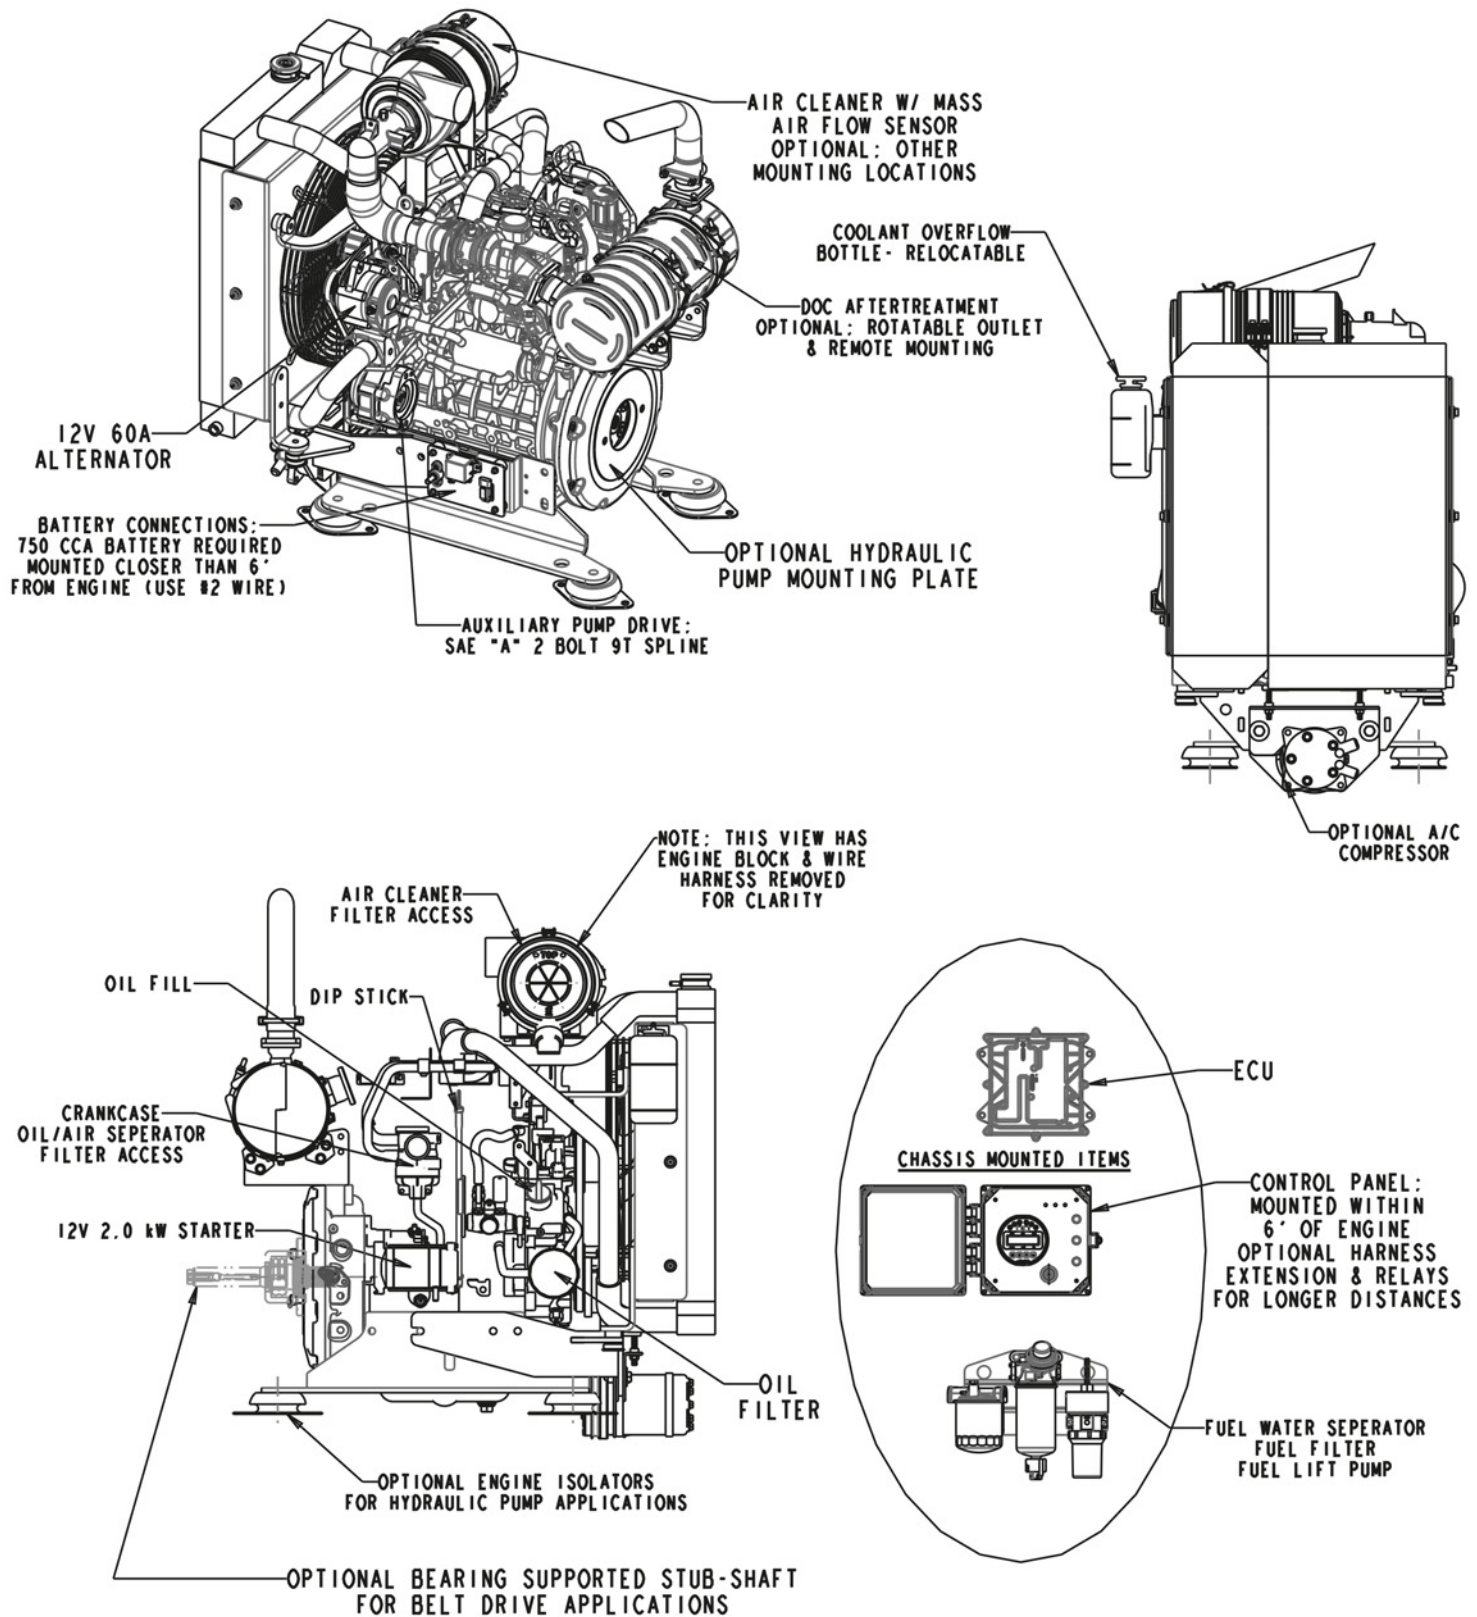


See back page for features and options.

EPS 65 HP Tier 4 Final Diesel Power Unit Details


65 HP ENCLOSED UNIT

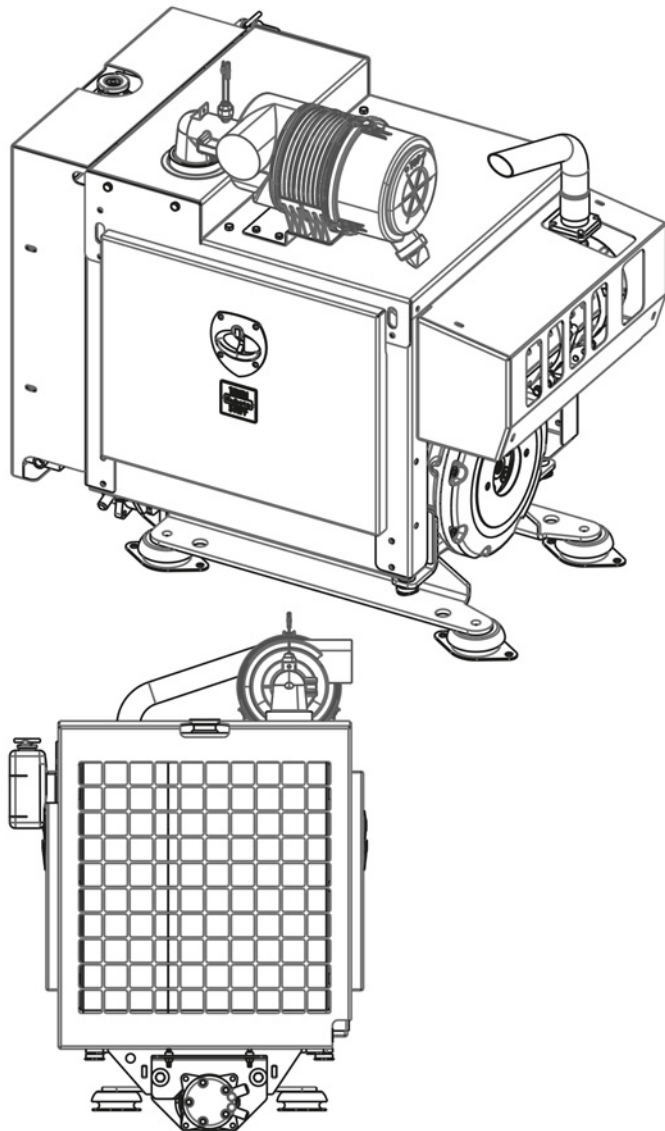

65 HP OPEN UNIT

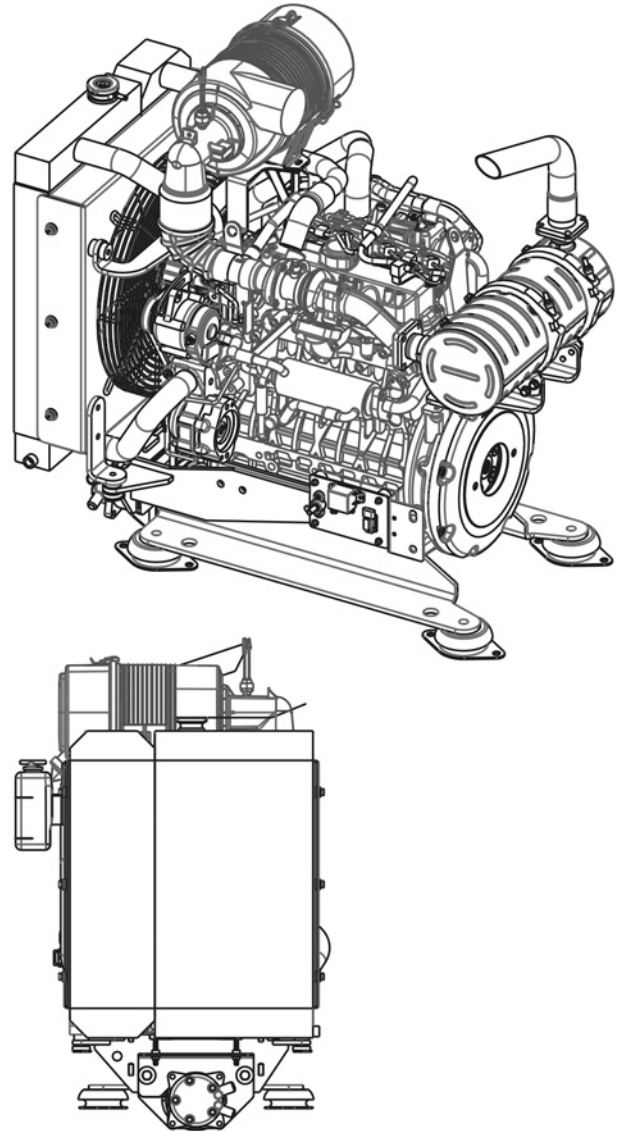

CONFIGURATION	ENCLOSED	OPEN
EPS Model Number	V2403TIE	V2403TIO
Power (HP)	65 @ 2,700 RPM	65 @ 2,700 RPM
Engine	Kubota V2403-CR-TIE4B	Kubota V2403-CR-TIE4B
Emission Tier	Tier 4 Final	Tier 4 Final
Torque	146.4 FT-LBF @ 1,500 RPM	146.4 FT-LBF @ 1,500 RPM
Fuel Consumption (US Gallons)	0.395 LB/HP-HR	0.395 LB/HP-HR
Length (inches)	42.66	41.52
Width (inches)	31.00	27.45
Height including eng. isolation (in.)	41.57	40.46
Weight (including oil & antifreeze)	N/A	N/A




All unit ratings are established at 68 degrees F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10 degrees F above 68 degrees F.

Illustrations shown may include optional equipment. Specifications subject to change without notice.

See back page for features and options.


EPS 65 HP Tier 4 Final Diesel Power Unit Details (cont'd)

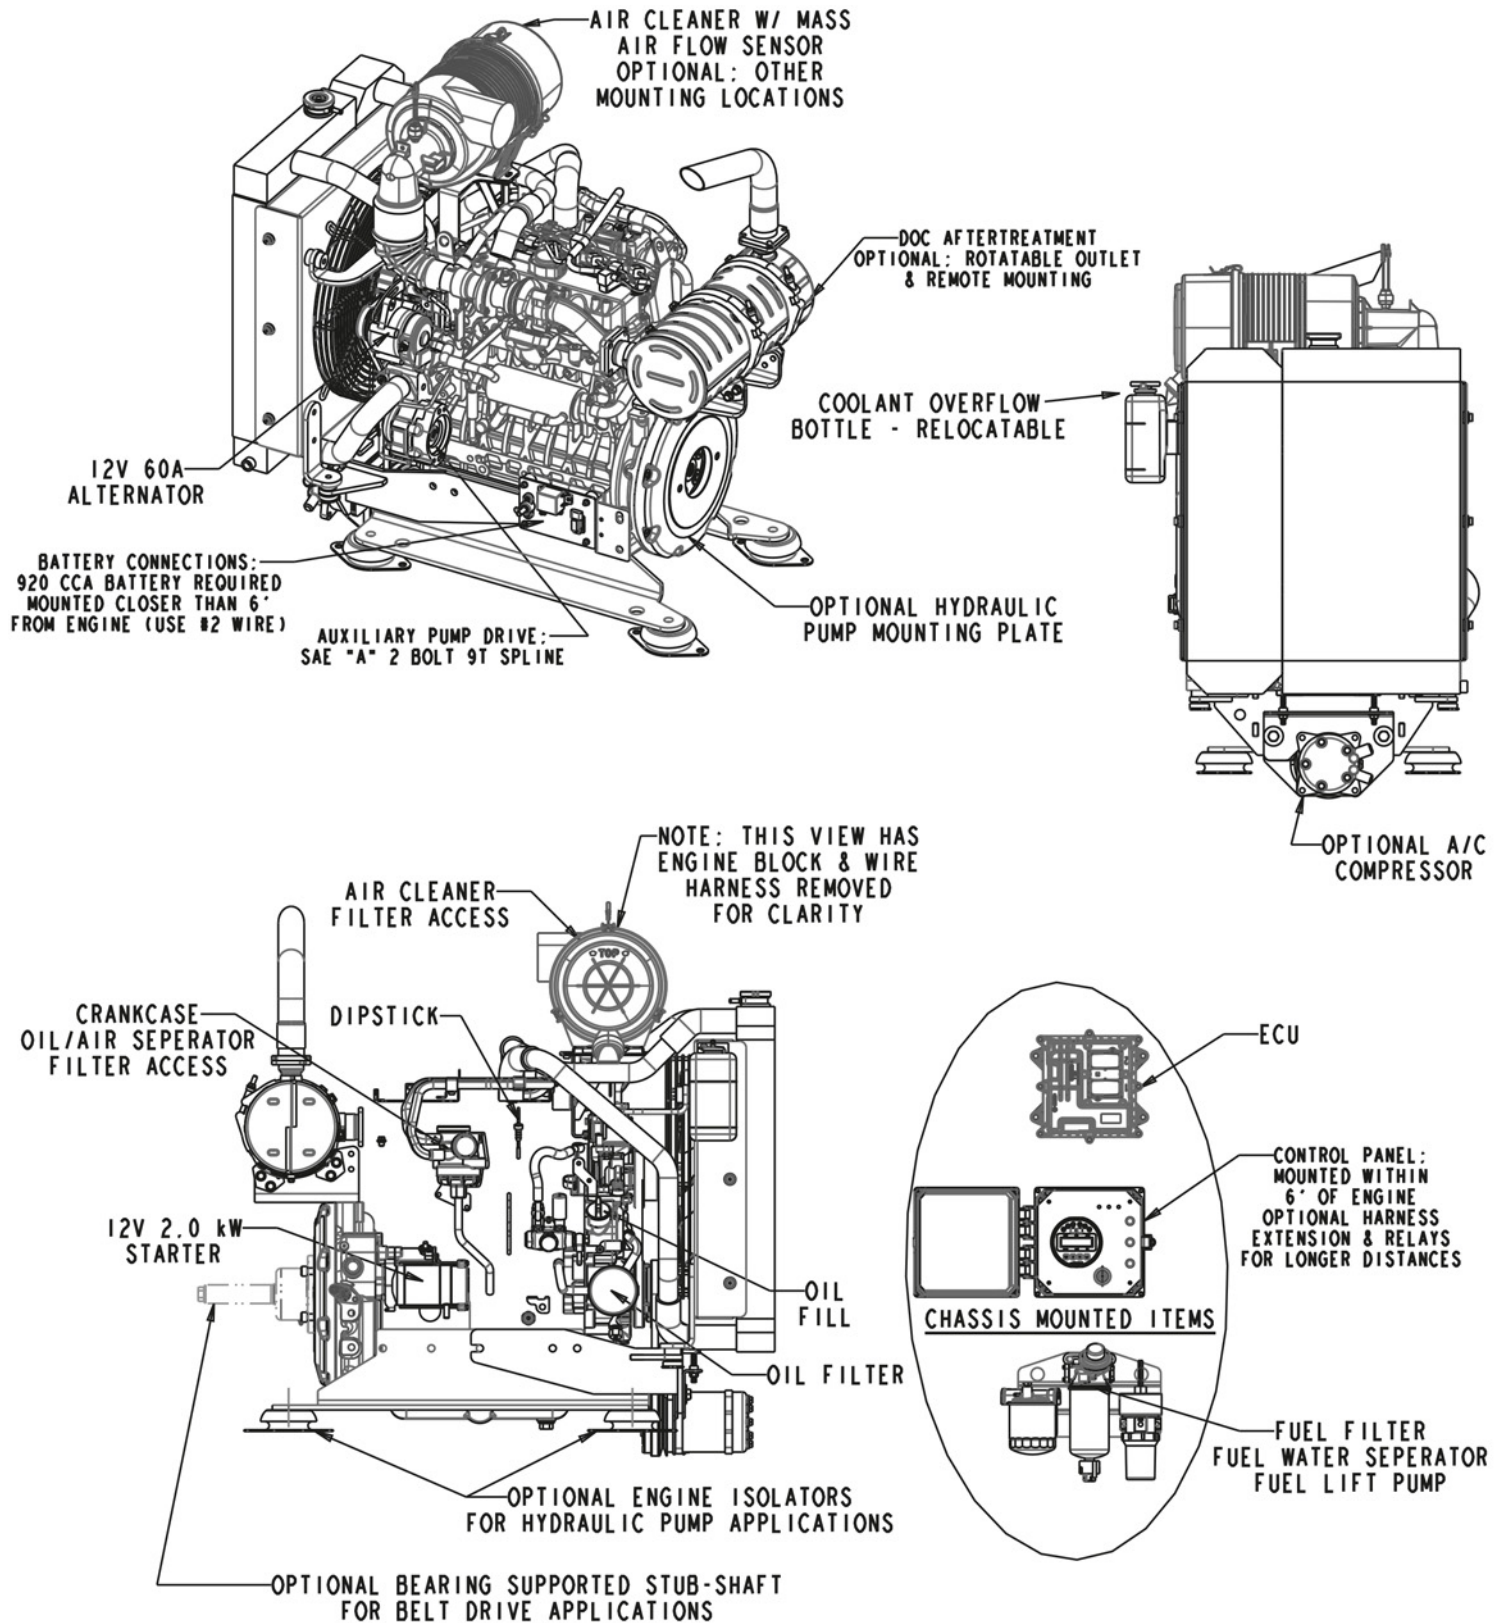


See back page for features and options.

EPS 74.3 HP Tier 4 Final Diesel Power Unit Details


74.3 HP ENCLOSED UNIT

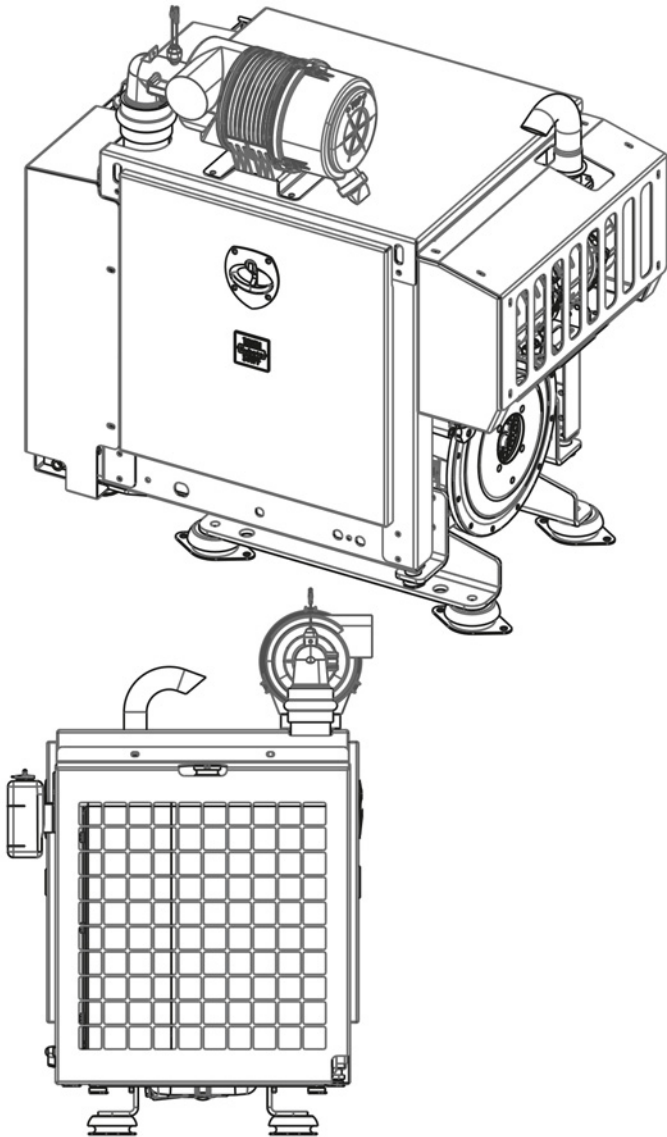

74.3 HP OPEN UNIT

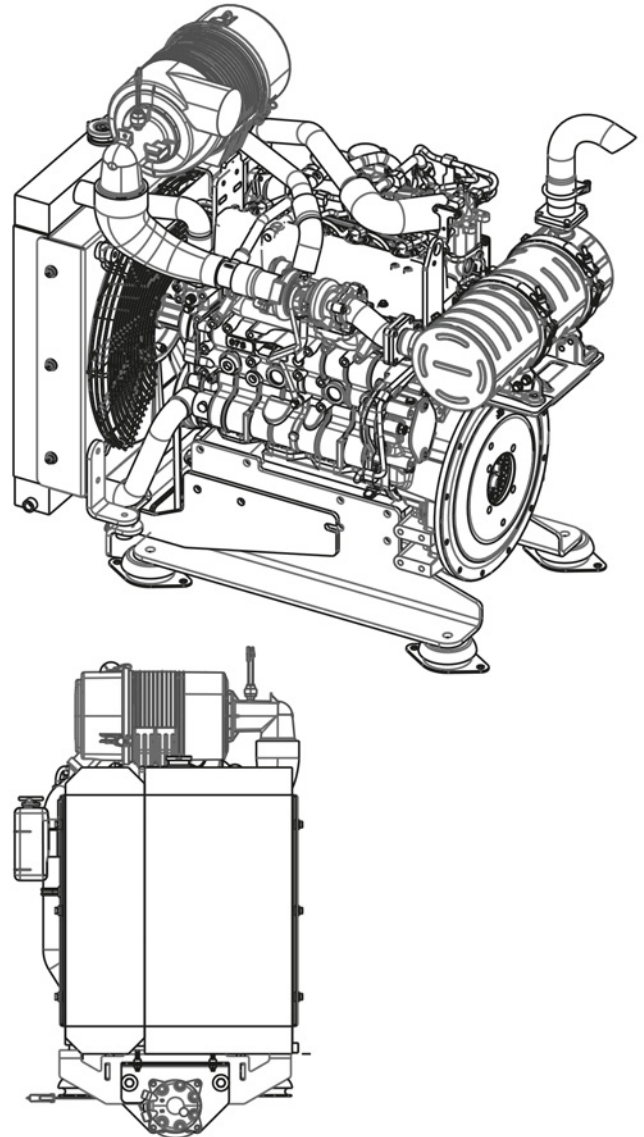

CONFIGURATION	ENCLOSED	OPEN
EPS Model Number	V3307TIE	V3307TIO
Power (HP)	74.3 @ 2,600 RPM	74.3 @ 2,600 RPM
Engine	Kubota V3307-CR-TIE4B	Kubota V3307-CR-TIE4B
Emission Tier	Tier 4 Final	Tier 4 Final
Torque	195.5 FT-LBF @ 1,500 RPM	195.5 FT-LBF @ 1,500 RPM
Fuel Consumption (US Gallons)	0.385 LB/HP-HR	0.385 LB/HP-HR
Length (inches)	42.63	41.42
Width (inches)	32.21	27.05
Height including eng. isolation (in.)	47.30	41.99
Weight (including oil & antifreeze)	N/A	N/A




All unit ratings are established at 68 degrees F and 500 ft. above sea level. De-rate unit by 3.5% for every 1000 ft. above 500 ft. and 1% for every 10 degrees F above 68 degrees F.


Illustrations shown may include optional equipment. Specifications subject to change without notice.

See back page for features and options.

EPS 74.3 HP Tier 4 Final Diesel Power Unit Details (cont'd)

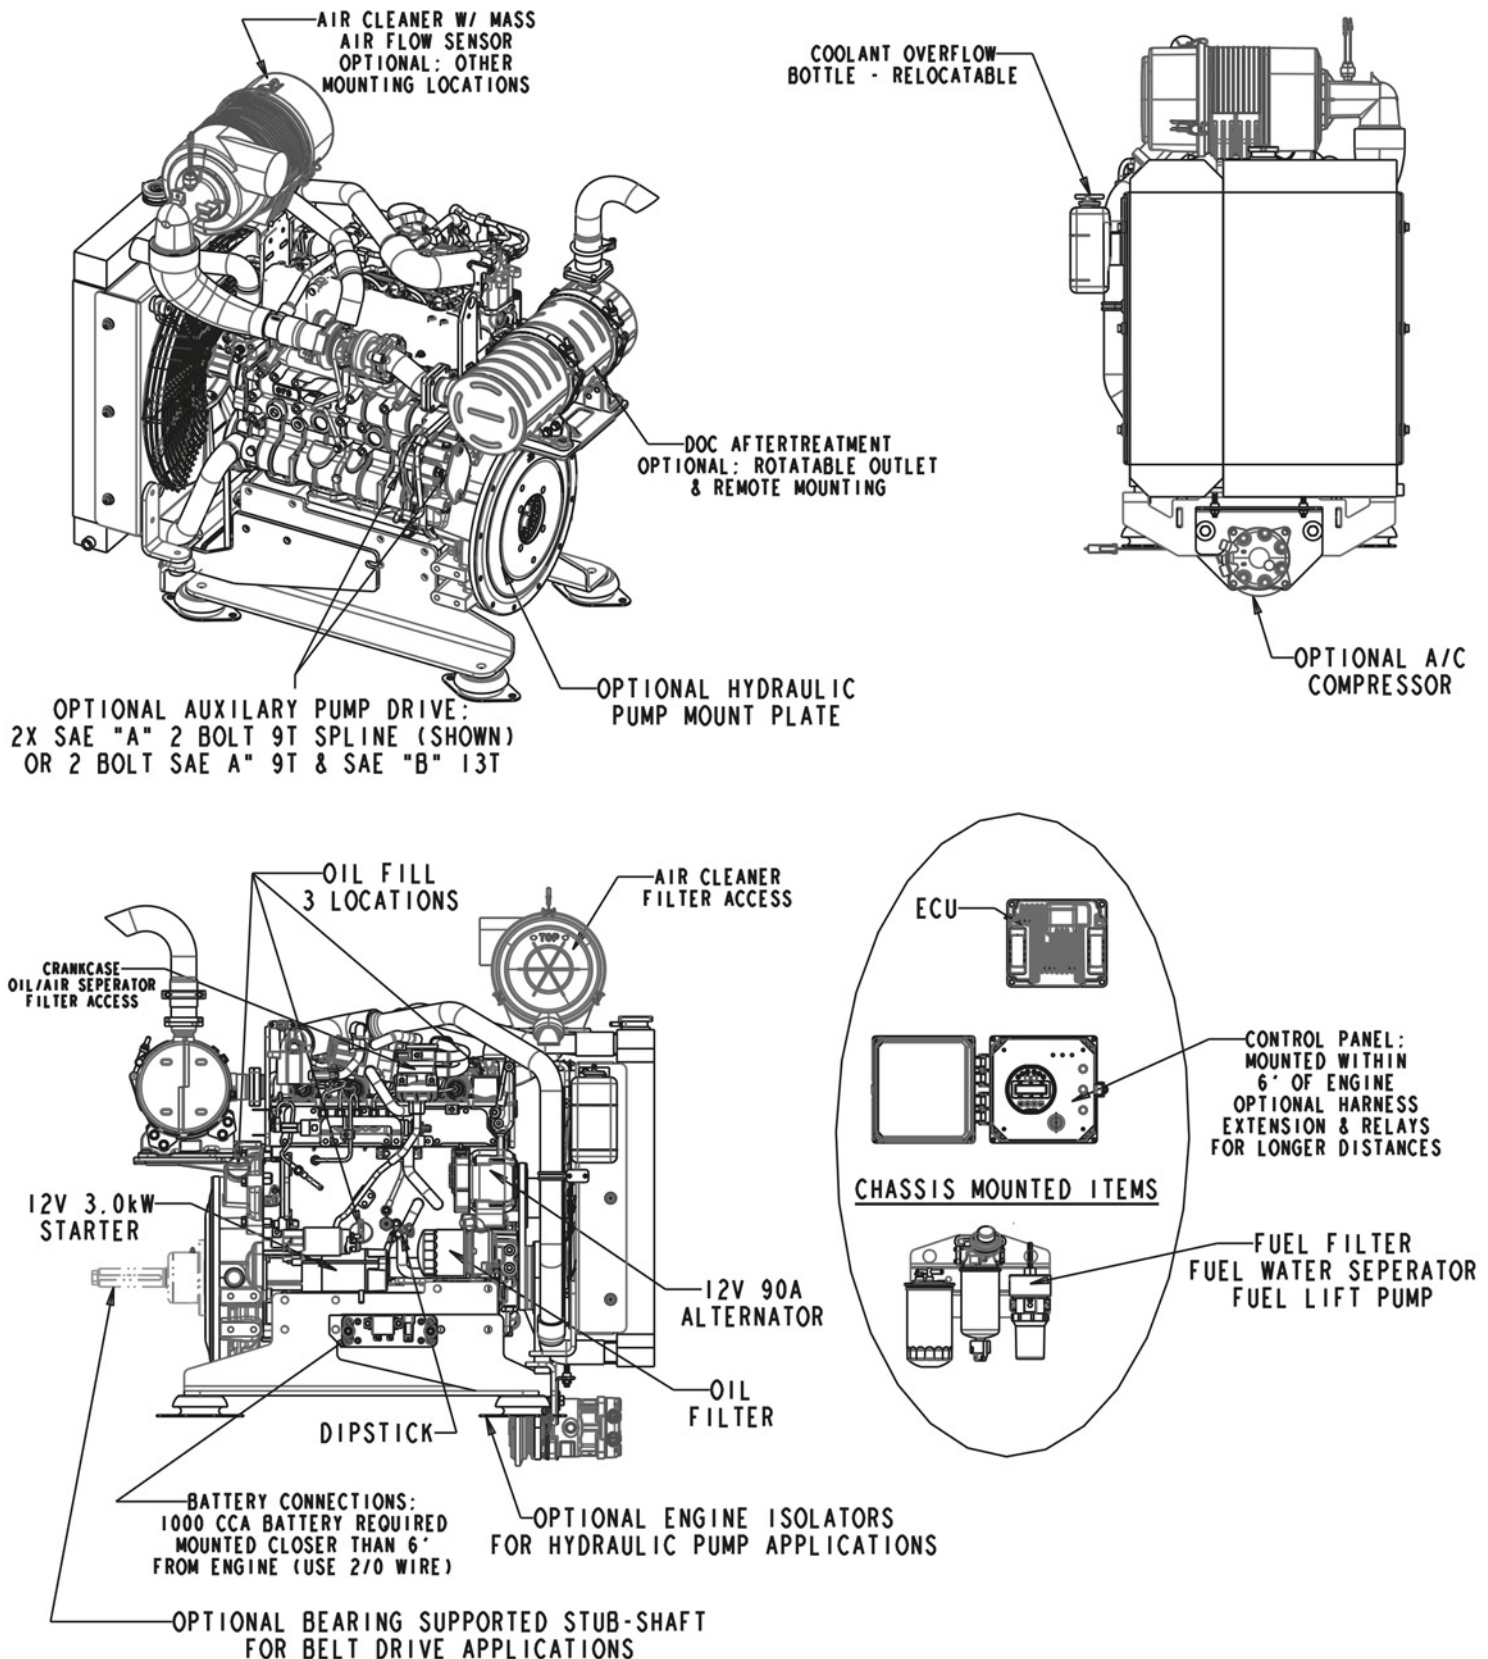

See back page for features and options.



65 HP Enclosed Unit

EPS Power Unit Standard Features

- Designed from the ground up to meet Tier 4 emissions regulations.
- Rugged construction top-to-bottom for dependable service and a long life.
- Compact modular designs have been optimized for high performance in minimal space.
- Enclosed models feature powder-coated galvanneal with aluminum doors.
- Each unit is fully tested to verify that performance meets specifications.
- Kubota water-cooled, Tier 4 diesel engine helps ensure reliability, long life and low cost operation.
- Units are available in open or enclosed configurations. Enclosed units help provide protection from the elements.
- Convenient single-side service with full access to engine maintenance parts.

Available Options*

- Flexible air cleaner options.
- Flexible exhaust tailpipe options.
- Auxiliary hydraulic pump gear drive.
- PTO: Hydraulic pump mounting plate or bearing -supported stub shaft.
- Air conditioning compressor.

* Certain options are not available for all units. Call for details. Specifications subject to change without notice. © 2018, Engine Power Source

Charlotte, NC Area
348 Bryant Blvd.
Rock Hill, SC 29732
704-944-1999

Toll-Free: 800-374-7522

enginepowersource.com